

CUSTOMER NO. 31013

180577-00120

REMARKS

Claims 1 to 6 are pending in this application. Claim 7 and 8 have been cancelled. Claims 1 to 6 have been rejected under 35 U.S.C. § 102(b). Favorable reconsideration of the claims is requested in view of the within remarks.

1. Election/Restriction

Responsive to the Examiner's requirement, Applicant has cancelled non-elected claims 7 and 8. Applicant respectfully requests rejoinder of claim 7 and 8, if independent claim 1 is allowed.

2. Rejection of Claims as Anticipated Under 35 USC §102(b)

The Examiner has rejected Claims 1-6 under 35 USC. §102(b) as anticipated by U.S. Patent No. 5,667,758 to Matsugi ("Matsugi"). The Examiner bases this rejection on the conclusion that Matsugi incorporates a heat pipe heat transfer device (9) on the exterior wall of his reaction vessel and that Matsugi's heat exchange device can be viewed as a "heat pipe" according to the present claims because the pending claims do not recite a porous medium affixed to a heat transfer surface. The Examiner further takes the position that the definition of heat pipe in the specification at page 3 is not read into the claims.

Applicant respectfully requests reconsideration of both of the above conclusions for the below reasons.

The Examining Attorney finds that no evidence has been submitted to demonstrate that a "heat pipe heat transfer device" is restricted to the description of the specification of U.S. Patent No. 2,350,348. Accordingly, the Examining Attorney concludes that claims can be construed broadly, whereby the rejection in view of Matsugi can be maintained. Applicant respectfully submits that this rejection is unfounded because the term "heat pipe" is a widely recognized term of art which is recognized by those skilled in the art to reference heat

CUSTOMER NO. 31013

180577-00120

transfer devices which utilize the evaporation of a cooling fluid from a porous medium affixed to a heat transfer surface to absorb heat. The term "heat pipe" is widely used in the technical literature to reference such devices, as illustrated in the following web pages, copies of which are attached:

1. www.aavidthermalloy.com/products/heatpipe/index.shtml
2. www.npowertek.com/what.html
3. www.cheresources.com/htpipes.shtml

The term heat pipe is also widely used in the title, specification and claims of numerous issued U.S. patents to identify the particular type of heat transfer device referenced above without further explanation of the meaning of the term. For example, the Examiner is referred to the titles and claims in U.S. Patent Nos. 4,582,125; 6,535,381; 6,571,683 and 6,647,625.

"Heat pipe" is specifically referenced in the definition of the devices covered by U.S. Class 165/104.26 and a search of this Class and Subclass finds hundreds of patents which reference "heat pipe" in their titles. Further, a search for patents assigned to U.S. Classification 165/104.26 which reference "heat pipe" in their claims, but which do not further describe the heat pipe by referencing the words wick or porous finds 161 patents. In this connection, see the attached search results.

Accordingly, the technical literature and past practice of the U.S. Patent Office clearly establish that heat pipe is a term of art which those skilled in the art understand to reference a particularly type of heat transfer device.

Further, Applicants' claims are fully consistent with Applicants' specification which at page 3, lines 5-9 advises that heat pipes utilize evaporation of a cooling fluid from a

CUSTOMER NO. 31013

180577-00120

porous medium affixed to a heat transfer surface to absorb heat, and that in the present invention, a heat pipe system is applied to an external surface of a tank reactor.

It is respectfully submitted that under the circumstances, there is no need to reference the specification to understand the meaning of the term heat pipe and that in any event, reference to the present specification should have clearly identified the meaning of the term since no limitation from the specification must be read into the claims.

Under the circumstances, Applicants submit that the claims as originally filed were definite and limited to a well known term of art, the "heat pipe", which does not encompass heat transfer devices of the type utilized in Matsugi, for the reasons explained in the previously filed Response to Official Action. If the search performed by the Examiner would not have uncovered all relevant prior art because it misconstrued the meaning of the term heat pipe, the Final Rejection should be withdrawn and a new search performed. Since the claims as filed were definite and are patentable over the cited prior art, it would be unjust to require Applicants to file a continuation application to overcome the Final Rejection. Further, since the term of any patent issuing from this application will run from the filing date of this application, Applicants should not be subjected to unnecessary delay associated with refiling the instant application.

If the search originally performed by the Examining Attorney was sufficiently broad to uncover all relevant prior art, the presently pending claims clearly define over the prior art of record and all claims should be allowed. Further, when the pending claims are properly construed, it is evident that the sealed heat pipes covered by Claims 2-6 of the application and the thermosyphon type heat pipes covered by claims 7 and 8 of the application are two well known varieties of heat pipe encompassed by independent Claim 1. Under the circumstances, upon the allowance of Claim 1, the restriction requirement should be withdrawn and Claims 7 and 8 rejoined in the application.

- 6 -

KL3,2312061.1


CUSTOMER NO. 31013

180577-00120

For the foregoing reasons, it is submitted that the presently pending claims are allowable and early issuance of a Notice of Allowability is requested.

No fee is believed to be necessary in connection with the filing of this paper. However, the Commissioner is hereby authorized to charge any fee required with respect to this Response to Deposit Account No. 50-0540. In the event that the Examining Attorney believes that there are any remaining issues which might possibly be resolved by a telephone interview, Applicants' attorney respectfully request the same. Applicants' attorney can be reached at the number provided below.

Dated: January 7, 2004

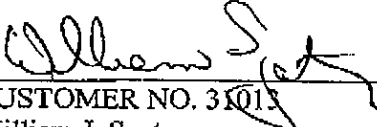
CUSTOMER NO. 31013
William J. Spatz
Reg. No. 30,108
Attorney for Applicants
KRAMER LEVIN NAFTALIS & FRANKEL LLP
919 Third Avenue
New York, New York 10022
(212) 715-9257 (telephone)
(212) 715-8437 (facsimile)



Home | Contact Us | About Aavid



Products

Design Resources

Technical Info

Global Sales

Useful Links

Quick Reference

Search by part #

Check distributor
part inventory

Stock Check

CLICK HERE!

Products

Browse Products

- By Device -

- By Product Line -

- Attachment Methods -

- Interface Materials -

- Accessories -



Useful Links

- [MSDS Safety Sheets](#)
- [How to order?](#)
- [Find Sales Rep](#)
- [Find Distributor](#)
- [Sample Request](#)
- [Quote Request](#)
- [Catalog Request](#)
- [Building a part #](#)
- [Part # Cross Ref](#)

Products / Heat Pipe Assemblies

Heat Pipe Assemblies

Although heat pipes themselves do not actually dissipate significant amounts of heat, they effectively transfer heat without a large increase in temperature. This transfer capability allows for positioning large amounts of heat dissipation surface at a point remote from the heat generator. Typically heat pipes range from 6 mm (1/4") O.D. to 25 mm (1.00") O.D. and will carry 100 to 1000 watts, respectively. The length of the heat pipe, type of fluid in the pipe, return wick type, and the number of bends in the pipe relate directly to the overall temperature rise of the heat pipe system.

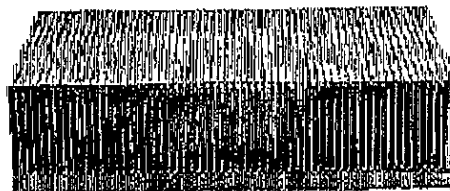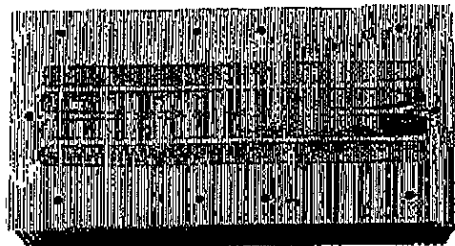

Design Guidelines

Orientation

In most cases, the application must have gravity working with the system; that is, the evaporator section (heated) must be lower, with respect to gravity, than the condenser (cooling) section.

Features

- Provide high thermal conductance with minimal temperature rise
- Distribute high heat loads
- Concentrate or disperse thermal power density, allowing matching of heat sources and heat sinks with differing thermal characteristics
- Separate heat source and heat sink, allowing placement of power devices in areas with insufficient space to add a heat sink capable of dissipating the amount of heat produced
- Reduce overall system size and costs

Heat Pipe Assemblies

Page 2 of 3

Temperature Limits

Most pipes use water and methanol/alcohol as the working fluids. Pipes will operate at temperatures as low as -40°C , but can carry only a fraction of the heat they can carry at temperatures of 0°C and higher. Upper temperature limits depend on the fluid, but 60°C to 80°C is the average limit.

Heat Removal

Heat can be removed from the condenser using air cooling in combination with either extrusion, bonded-fin heat sinks, or flat-fin stock. Enclosing the condenser in a cooling jacket allows liquid cooling.

HiContact Option

To help decrease the temperature rise between the heat generator and the heat pipe working fluid, a HiContact design can be used to make intimate contact between the mounting surface and the part to be cooled.

Limitations

- Exceeding the rated thermal power that can be dissipated at a given temperature will increase the overall temperature differential along the heat pipe.
- Exceeding the pumping capacity of the wick will

- cause the temperature to rise rapidly.
- Exceeding the critical power density at any point in the input area can cause thermal runaway.

Heat Pipe Operation

A heat pipe is a closed evaporator-condenser system consisting of a sealed, hollow tube whose inside walls are lined with a capillary structure or wick. Thermodynamic working fluid, with substantial vapor pressure at the desired operating temperature, saturates the pores of the wick. When heat is applied to the heat pipe, its fluid heats and evaporates. As the evaporating fluid fills the hollow center of the wick, it diffuses throughout the heat pipe. Condensation of the vapor occurs wherever the temperature is even slightly below that of the evaporation area. As it condenses, the vapor gives up the heat it acquired during evaporation. This effective thermal conductance helps maintain constant temperatures.

Attaching a heat sink to a portion of the heat pipe makes condensation take place at this point of heat loss and establishes a vapor flow pattern. Capillary action within the wick returns the condensate to the evaporator (heat source) and completes the operating cycle. This system, proven in aerospace applications, transmits thermal energy at rates hundred of times greater and with a far superior energy-to-weight ratio than can be gained from the most efficient solid conductor.

[Home](#) • [Aavid's Family of Companies](#) • [Sitemap](#)
[Disclaimer Statement](#) • ©2003 Aavid Thermalloy, LLC

What's Heat Pipe?

Page 1 of 3

TTIC 富海國際企業股份有限公司

Thermal Transtech International Corporation

TTIC heat pipe thermal solutions

| Heat pipe&column | Heat column cooler |
CPU cooler | Heat sinks |

LU文版

① Home Page

② What's Heat Pipe?

Products Classified

③ Heat pipe & Column

④ Heat column Cooler

⑤ CPU Cooler

⑥ Heat Sink

Order / Inquiry

Contact Info



What is Heat Pipe?

TTIC Heat Pipe Features:

1. Provide high thermal conductivity with small temperature difference.
2. Fast thermal response.
3. Small size and light weight.
4. Large variety of shapes.
5. No electrical power supply required, and maintenance free.
6. Reduce overall system size and costs.


TTIC Heat Pipe

A efficient heat pipe system can be affected by length of a heat pipe, type of fluid in a return wick type, and the number of bends in a heat pipe.

TTIC heat pipe technology has been applied to computer cooling for years. We provide cost effective heat pipe solution. Its small, compact profile and light weight allow it to meet demanding requirements of computer.

Sintered Powder

This process will provide high power handling, low temperature gradients and high cap for anti-gravity applications. The photograph shows a complex sintered wick with several channels and small arteries to increase the liquid flow rate. Very tight bends in the heat pipe are achieved with this type of structure.

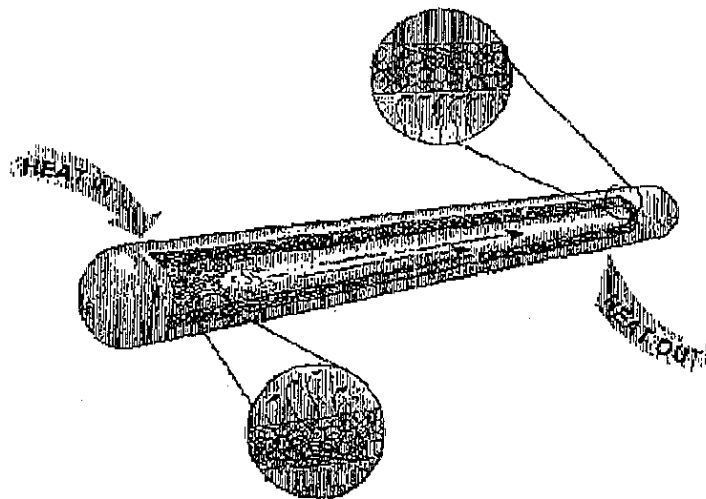

What's Heat Pipe?

A heat pipe is a simple device that can quickly transfer heat from one point to another, usually used for cooling an electronic component in air-conditioners, refrigerators, heat

What's Heat Pipe ?

Page 2 of 3


transistors, capacitors, etc. Heat pipes are also used in laptops to reduce the working t for better efficiency.



Heat Pipe Structure:

A heat pipe is consisting of following three basic components:

1. container
2. the wick or capillary.
3. the working fluid

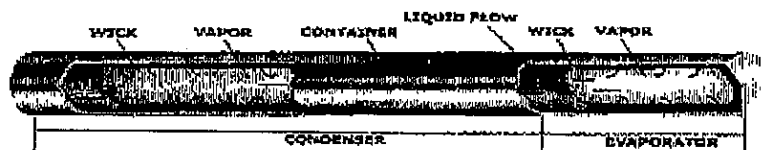

First, the container is a sealed, hollow tube, which can isolate the working fluid from the environment and can maintain the pressure differential across its walls, and enable tra to take place from and into the working fluid. Inside walls of the container are lined with structure, which is called capillary structure or wick. The prime purpose of the wick is to capillary pressure to transport the working fluid from the condenser to the evaporator. F working fluid is contained in wick structured container. The first consideration of choosi working fluid is the operating vapour temperature range. Most pipes use water and methanol/alcohol as working fluid.

How do Heat Pipes Operate?

One end of the heat pipe attached to the heat source. As the heat rising to the desired temperature, the tube boils the working fluid and turns it into a vapor.


As the evaporating fluid fills the hollow center of the wick, it spreads throughout the he toward to the other cold end. Condensation of the vapor occurs wherever the temperat slightly below that of the evaporation area. As it condenses, the vapor gives up the hea during evaporation and the condensed working fluid is then sucked back to the evaporon along the wick structure. This thermodynamic cycle continues and helps maintain cons temperatures.

Attaching a heat sink to a portion of the heat pipe makes condensation take place at th heat loss and establishes a vapor flow pattern. Capillary action within the wick returns condensate to the evaporator(heat source) and completes the operating cycle.

Heat Pipe Operating Animation

What's Heat Pipe ?

Page 3 of 3

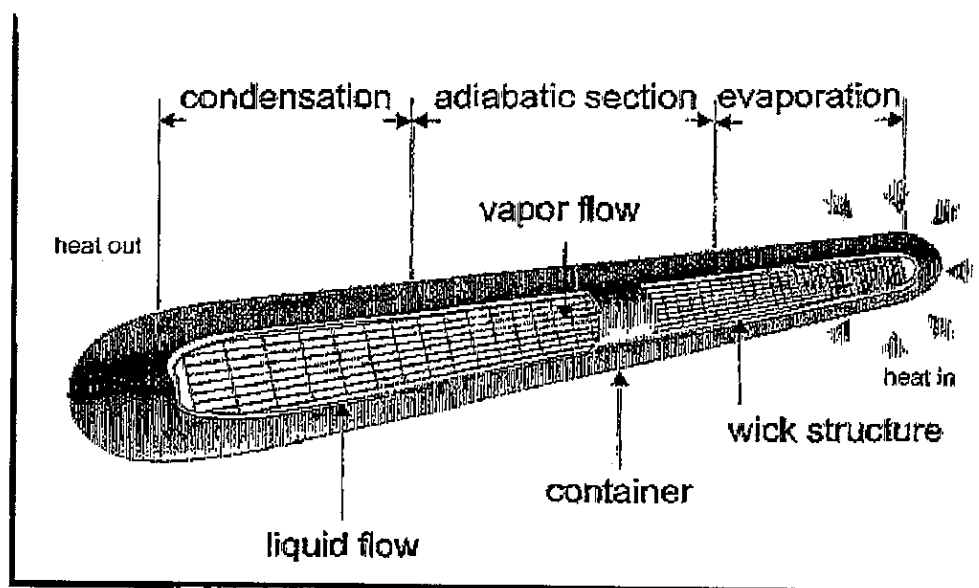

| Heat pipe&column | Heat column cooler | CPU cooler | Heat sinks

"Power Cooling Solutions

Web: www.nPowerTek.com
Email: Sale@nPowerTek.com
TEL: +886-2-2999-6157
FAX: +886-2-2995-2780

Thermal Transtech International Corporation
9F-12, No.14, Lane 609, Sec. 5, Chungshin Rd.,
Sanchung City, Taipei, 241
Taiwan, R.O.C.

Copyright © 2001 Thermal Transtech International Corp. All Rights Reserved

What is a Heat Pipe?

Page 1 of 11

**FREE TRADE
PUBLICATIONS**
Click Here
**FREE
Technical
Forums**
Get answers to
your questions now

**Premium
Service**
\$34.99 USD
One fee, One time
ChE Plus
Click to Learn More



ChE Plus
Click here to learn more

...specification sheets
...calculations
...spreadsheets
...central library
...ChE KnowledgeBase
...and more

What is a Heat Pipe?

Introduction

A heat pipe is a simple device that can quickly transfer heat from one point to another. They are often referred to as the "superconductors" of heat as they possess an extraordinary heat transfer capacity & rate with almost no heat loss.

The idea of heat pipes was first suggested by R.S. Gaugler in 1942. However, it was not until 1962, when G.M. Grover invented it, that its remarkable properties were applied & serious development began.

It consists of a sealed aluminum or copper container whose inner surfaces have a wicking material. A heat pipe is similar to a thermosyphon. It differs from a thermosyphon by virtue of its ability to transport heat against gravity by an evaporation-condensation cycle with the help of porous capillaries that form the wick. The wick provides the capillary driving force to return the condensate to the evaporator. The quality and wick usually determines the performance of the heat pipe, for this is the heart of the product. Different types of wicks are used depending on the application for which the pipe is being used.

Design Considerations

The three basic components of a heat pipe are:

1. the container
2. the working fluid
3. the wick or capillary structure

Container

The function of the container is to isolate the working fluid from the outside environment. It has to therefore be leak-proof, maintain the pressure differential across its walls to enable transfer of heat to take place from and into the working fluid.

Selection of the container material depends on many factors. These are as follows:

- Compatibility (both with working fluid and external environment)
- Strength to weight ratio

What is a Heat Pipe?

Page 2 of 11

Ads by Google

Heat Transfer Fluids
Cooling, Heating -40 F
to +650 F Multi
Application Tech
Support
www.parrtherm.com

- Thermal conductivity
- Ease of fabrication, including welding, machineability and ductility
- Porosity
- Wettability

Most of the above are self-explanatory. A high strength to weight ratio is more important in spacecraft applications. The material should be non-porous to prevent the diffusion of vapor. A high thermal conductivity ensures minimum temperature drop between the heat source and the wick.

Houston Unlimited, Inc.
Leaders in Salt Bath
Nitriding Providing
corrosion resistance
www.HoustonUnlimitedInc.com

Working fluid

A first consideration in the identification of a suitable working fluid is the operating temperature range. Within the approximate temperature band, several possible working fluids may exist, and a variety of characteristics must be examined in order to determine the most acceptable of these fluids for the application considered. The requirements are:

Molybdenum
bar, sheet, plate, strip,
tubes inventory shipped
immediately
www.eaglealloys.com

- compatibility with wick and wall materials
- good thermal stability
- wettability of wick and wall materials
- vapor pressure not too high or low over the operating temperature range
- high latent heat
- high thermal conductivity
- low liquid and vapor viscosities
- high surface tension
- acceptable freezing or pour point

FREE RESOURCES

Siporm highporous
sintered materials; PE
CrNi & bronze
customised structural
components
www.siporm.com

The selection of the working fluid must also be based on thermodynamic considerations which are concerned with the various limitations to heat flow occurring within the heat pipe like, viscous, sonic, capillary, entrainment and nucleate boiling levels.

In heat pipe design, a high value of surface tension is desirable in order to enable the heat pipe to operate against gravity and to generate a high capillary driving force. In order to achieve high surface tension, it is necessary for the working fluid to wet the wick and the wall material i.e. contact angle should be zero or very small. The vapor pressure over the operating temperature range must be sufficiently great to avoid high vapor velocities.

Article Resources

[Feature Articles](#)
[For Your Information](#)
[ChE in Everyday Life](#)
[ChE in Action](#)
[ChE Business](#)
[Process Engineering As I See It](#)
[Archives](#)

Other Resources

[ChE Links](#)
[Take a Tour](#)
[Resource Center](#)
[Search This Site](#)
[Software Corner](#)
[Physical Properties on the Internet](#)
[Email Archives / FAQ](#)
[ChE Message Board](#)
[Book Corner](#)
[Submit an Article](#)
[Sitemap](#)
[Feedback](#)
[Staff](#)
[Back to Main Page](#)

which tend to setup large temperature gradient and cause flow instabilities.

A high latent heat of vaporization is desirable in order to transfer large amounts of with minimum fluid flow, and hence to maintain low pressure drops within the he. The thermal conductivity of the working fluid should preferably be high in order to minimize the radial temperature gradient and to reduce the possibility of nucleate at the wick or wall surface. The resistance to fluid flow will be minimized by choi fluids with low values of vapor and liquid viscosities. Tabulated below are a few r with their useful ranges of temperature.

<i>MEDIUM</i>	<i>MELTING PT. (°C)</i>	<i>BOILING PT. AT ATM. PRESSURE (°C)</i>	<i>USEFUL RANGE (°C)</i>
Helium	-271	-261	-271 to -269
Nitrogen	-210	-196	-203 to -160
Ammonia	-78	-33	-60 to 100
Acetone	-95	57	0 to 120
Methanol	-98	64	10 to 130
Flutec PP2	-50	76	10 to 160
Ethanol	-112	78	0 to 130
Water	0	100	30 to 200
Toluene	-95	110	50 to 200
Mercury	-39	361	250 to 650
Sodium	98	892	600 to 1200
Lithium	179	1340	1000 to 1800
Silver	960	2212	1800 to 2300


Wick or Capillary Structure

It is a porous structure made of materials like steel, aluminium, nickel or copper i ranges of pore sizes. They are fabricated using metal foams, and more particularly the latter being more frequently used. By varying the pressure on the felt during a various pore sizes can be produced. By incorporating removable metal mandrels, arterial structure can also be molded in the felt.

Fibrous materials, like ceramics, have also been used widely. They generally have pores. The main disadvantage of ceramic fibres is that, they have little stiffness and require a continuous support by a metal mesh. Thus while the fibre itself may be ch compatible with the working fluids, the supporting materials may cause problems recently, interest has turned to carbon fibres as a wick material. Carbon fibre filan have many fine longitudinal grooves on their surface, have high capillary pressure chemically stable. A number of heat pipes that have been successfully constructed carbon fibre wicks seem to show a greater heat transport capability.

What is a Heat Pipe?

Page 4 of 11

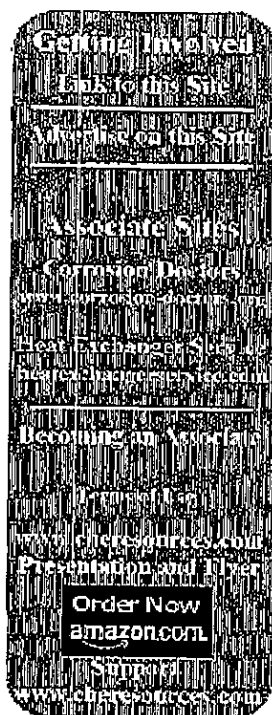

The prime purpose of the wick is to generate capillary pressure to transport the working fluid from the condenser to the evaporator. It must also be able to distribute the liquid around the evaporator section to any area where heat is likely to be received by the pipe. Often these two functions require wicks of different forms. The selection of a wick for a heat pipe depends on many factors, several of which are closely linked to the properties of the working fluid.

The maximum capillary head generated by a wick increases with decrease in pore size. The wick permeability increases with increasing pore size. Another feature of the wick which must be optimized, is its thickness. The heat transport capability of the heat pipe is raised by increasing the wick thickness. The overall thermal resistance at the evaporator also depends on the conductivity of the working fluid in the wick. Other necessary properties of the wick are compatibility with the working fluid and wettability.

The most common types of wicks that are used are as follows:

Sintered Powder

This process will provide high power handling, low temperature gradients and high capillary forces for anti-gravity applications. The photograph shows a complex sintered wick with several vapor channels and small arteries to increase the liquid flow rate. Very tight bends in the heat pipe can be achieved with this type of structure.

The small capillary driving force generated by the axial grooves is adequate for low power heat pipes when operated horizontally, or with gravity assistance. The tube is readily bent. When used in conjunction with screen mesh the performance can be considerably enhanced.

Screen Mesh

This type of wick is used in the majority of the products and provides readily variable characteristics in terms of power transport and orientation sensitivity, according to the number of layers and mesh counts used.

Working

Inside the container is a liquid under its own pressure, that enters the pores of the material, wetting all internal surfaces. Applying heat at any point along the surface of the heat pipe causes the liquid at that point to boil and enter a vapor state. When that happens the liquid picks up the latent heat of vaporization. The gas, which then has a higher pressure, moves inside the sealed container to a colder location where it condenses. The gas gives up the latent heat of vaporization and moves heat from the input to the end of the heat pipe.

Patent Database Search Results: CCL/"165/104.26" AND ACLM/"heat pipe" ANDNOT ... Page 1 of 2

USPTO PATENT FULL-TEXT AND IMAGE DATABASE[Home](#)[Quick](#)[Advanced](#)[Pat Num](#)[Help](#)[Next List](#)[Bottom](#)[View Cart](#)

Searching 1976 to present...

Results of Search in 1976 to present db for:

(((CCL/"165/104.26" AND ACLM/"heat pipe") ANDNOT ACLM/porous) ANDNOT ACLM/wick): 161 patents.

Hits 1 through 50 out of 161

[Next 50 Hits](#)[Jump To](#)[Basic Search](#)

[CCL/"165/104.26" AND ACLM/"heat pipe" ANDNOT AC

PAT. NO.	Title
1 6,661,660	Integrated vapor chamber heat sink and spreader and an embedded direct heat pipe attachment
2 6,595,269	Flexible heat pipe structure and associated methods for dissipating heat in electronic apparatus
3 6,585,039	Composite overmolded heat pipe construction
4 6,571,863	Turbulence inducing heat pipe for improved heat transfer rates
5 6,535,386	Electronic assembly having a heat pipe that conducts heat from a semiconductor die
6 6,523,259	Method of manufacturing a heat pipe
7 6,519,149	Radiator mechanism and electronic apparatus
8 6,478,997	Polymer heat pipe with carbon core
9 6,460,612	Heat transfer device with a self adjusting wick and method of manufacturing same
10 6,437,983	Vapor chamber system for cooling mobile computing systems
11 6,382,306	Geometrical streamline flow guiding and heat-dissipating structure
12 6,367,263	Integrated circuit refrigeration device
13 6,303,191	Process for the production of a heat pipe
14 6,269,866	Cooling device with heat pipe
15 6,269,865	Network-type heat pipe device
16 6,262,892	Cooling fan for computing devices with split motor and fan blades
17 6,186,755	Scroll fluid machine having a heat pipe inside the drive shaft
18 6,169,660	Stress relieved integrated circuit cooler

Patent Database Search Results: CCL/"165/104.26" AND ACLM/"heat pipe" ANDNOT ... Page 2 of 2

- 19 [6,167,955](#) [T](#) [Multi-mode heat transfer using a thermal heat pipe valve](#)
20 [6,164,368](#) [M](#) [Heat sink for portable electronic devices](#)
21 [6,152,213](#) [M](#) [Cooling system for electronic packages](#)
22 [6,148,906](#) [M](#) [Flat plate heat pipe cooling system for electronic equipment enclosure](#)
23 [6,070,654](#) [T](#) [Heat pipe method for making the same and radiating structure](#)
24 [6,065,529](#) [T](#) [Embedded heat pipe structure](#)
25 [6,047,766](#) [M](#) [Multi-mode heat transfer using a thermal heat pipe valve](#)
26 [6,041,850](#) [T](#) [Temperature control of electronic components](#)
27 [6,026,890](#) [M](#) [Heat transfer device having metal band formed with longitudinal holes](#)
28 [6,003,591](#) [M](#) [Formed laminate heat pipe](#)
29 [5,960,866](#) [T](#) [Method for manufacturing cooling unit comprising heat pipes and cooling unit](#)
30 [5,937,936](#) [T](#) [Heat sink for portable electronic devices](#)
31 [5,899,265](#) [T](#) [Reflux cooler coupled with heat pipes to enhance load-sharing](#)
32 [5,841,244](#) [M](#) [RF coil/heat pipe for solid state light driver](#)
33 [5,785,088](#) [M](#) [Fiber pore structure incorporate with a v-shaped micro-groove for use with heat pipes](#)
34 [5,720,339](#) [T](#) [Refractory-composite/heat-pipe-cooled leading edge and method for fabrication](#)
35 [5,682,943](#) [T](#) [Honeycomb sandwich panel with built in heat pipes](#)
36 [5,647,429](#) [M](#) [Coupled, flux transformer heat pipes](#)
37 [5,560,423](#) [T](#) [Flexible heat pipe for integrated circuit cooling apparatus](#)
38 [5,522,455](#) [M](#) [Heat pipe manifold with screen-lined insert](#)
39 [5,465,782](#) [T](#) [High-efficiency isothermal heat pipe](#)
40 [5,465,708](#) [M](#) [Trough-shaped collector](#)
41 [5,460,163](#) [M](#) [Trough-shaped collector](#)
42 [5,409,055](#) [M](#) [Heat pipe type radiation for electronic apparatus](#)
43 [5,360,058](#) [M](#) [Heat pipe for transferring heat](#)
44 [5,358,033](#) [M](#) [Heat pipe, with a cooled bubble trap](#)
45 [5,346,000](#) [M](#) [Heat pipe with a bubble trap](#)
46 [5,335,720](#) [T](#) [Heat pipe](#)
47 [5,314,011](#) [M](#) [Heat pipe](#)
48 [5,309,986](#) [M](#) [Heat pipe](#)
49 [5,219,021](#) [T](#) [Large capacity re-entrant groove heat pipe](#)
50 [5,219,020](#) [M](#) [Structure of micro-heat pipe](#)

Next List	Top	View Cart		
Home	Quick	Advanced	Pat Num	Help